







LED IP65 Corrosion Proof

Code	Wattage	Lumen
S55WTW5FT	55W	8250 LM
S55WTW5FT-5K	55W	8250 LM
S55WTW5FT-EM	55W	8250 LM
S55W M SENS	55W	8250 LM
S55W EME M SENS	55W	8250 LM
S22WTW2FT	22W	2420 LM
S35WTW5FT	35W	3850 LM
S46WTW4FT	46W	5060 LM
S70WTW6FT	70W	7000 LM

- Polycarbonate body and diffuser
- 150Lm/W
- IP65 Rating
- Supplied with stainless steel clips and mounting brackets
- Hinged diffuser and tray
- Multiple gland entry points at both ends
- Impact rating IK08
- 5 year warranty

- 3hr maintained emergency back up
- Transmitting power: <0.5mW
- Power Consumption: ≤0.5mW(standby) <1W(operation)
- Detection Angle: 150° (Wall Installation) 360° (Ceiling Installation)
- Detection zone: Max.(D x H): 12m x 6m
- Detection sensitivity: 10%/ 25%/50%/75%/100%

- Operating Temp: -20°C ~ 50°C
- Operating Voltage: 220~240Vac, 50Hz

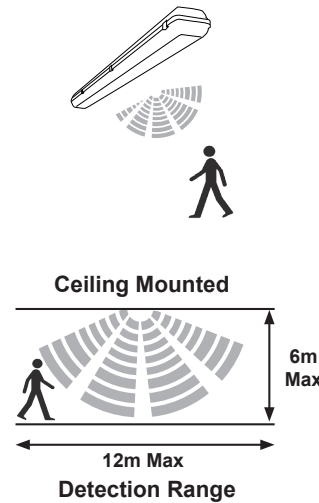

Solas Geal Distribution Ltd, Unit 7 & 8 Ashbourne Business Centre, Ballybin Road, Ashbourne, Co. Meath, A84 YP58, Ireland.
 SGD Solas Geal UK Ltd, Unit 32 Junction One Business Park, Valley Road, Birkenhead, Wirral, Merseyside, UK, CH41 7ED.

Tel: +353 1 8357447. UK Ph: 0330 551 7000. Fax: 00353 1 8357448. Email: info@sgd.ie. Website: www.sgd.ie